


Application and Features

- **Standard:**
without locating pegs, Tray packing and without "PickUp Cap"
- Also available "Reel" packing
- Designed to mate with IDC female connector IDS-xxx-X 200-95/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

PCB Surface Mount Layout

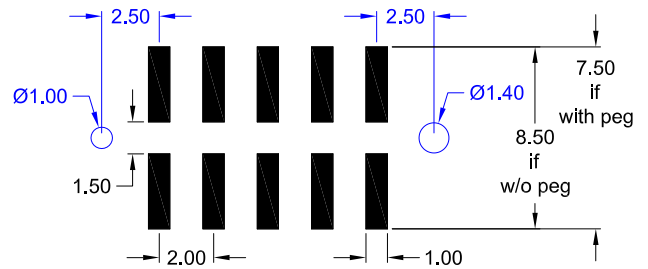

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) PA6T UL 94 V-0

How to order

SLS - xxx - H562 - 55/2 X

Nbr of pins
without "locating pegs" 006 to 068
except: 038; 042; 046; 048; 052 054; 056; 058; 062; 066
with "locating pegs" 008 to 050

Plating
55 = Gold
other platings on request

Options
without "locating pegs"
F = Tray packing; with „PickUp Cap“
T = Tube packing; without „PickUp Cap“
A = Tube packing; with „PickUp Cap“
B = Reel packing; with „PickUp Cap“
with "locating pegs"
C = Tube packing; without „PickUp Cap“
D = Tube packing; with „PickUp Cap“
E = Reel packing; with „PickUp Cap“